

LONKING



LONKING



LONKING HOLDINGS LIMITED
LONKING (SHANGHAI) FORKLIFT SALES CO.,LTD.

Add:196,Xinrun Road,Xinqiao,Songjiang Industrial,Zone Shanghai
Sales Hot-line:+86-21-37602160 sales hotline:+86-400-021-6969
Fax:+86-21-61303339-8195 E-mail:ccfw@lonking.cn
<http://www.lonking.cc> P.C:201612



OHSAS45001:2023



ISO14001:2015



ISO9001:2015



CE CERTIFICATE



UKCA CERTIFICATE



CBD15NL
Electric Pallet Truck



- With a brand new appearance design, the vehicle is compact, lightweight and easy to operate.
- A large number of steel plate stamping, sturdy and durable, high grade.
- The long handle design meets the needs of ergonomics and safety. The handle is equipped with an anti-collision switch for safer operation.
- Upright walking function is standard, which is convenient for working in narrow places.
- Open design makes disassembly and replacement of batteries simple and convenient.


Configuration Option Sheet

CBD15NL

Configuration			
Curtis Controller	Dual Carrier Wheels	Lithium Battery 24V/30Ah	Emergency Stop Switch
Fork Length 1150mm	Fork Outer Width 685mm		
Optional			
Lithium Battery 20Ah	Fork Outer Width 560mm		

Structure Diagram

CBD15NL

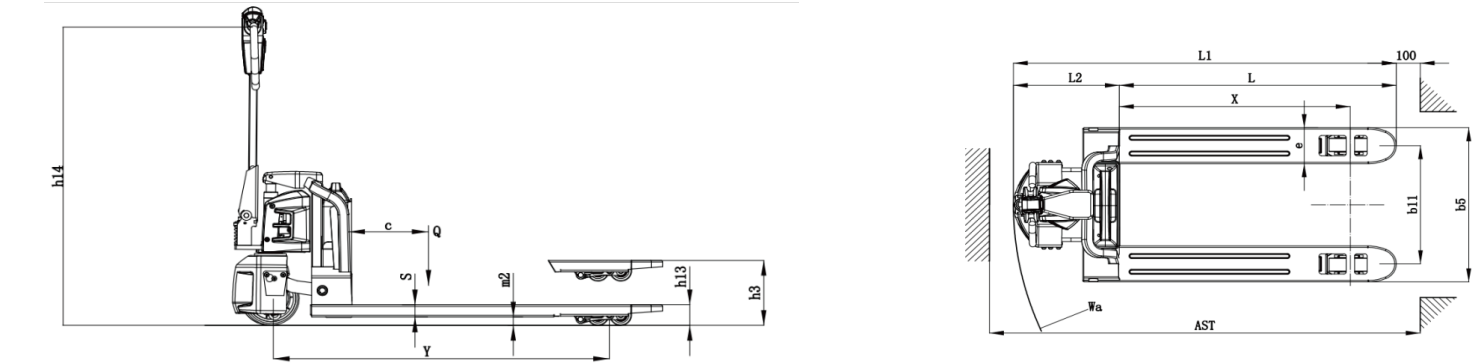

Overall Specifications

CBD15NL

Character				
1.01	Manufacturer			LONKING
1.02	Model			CBD15N1D2L
1.03	Power type			Lithium battery
1.04	Rated capacity	Q	kg	1500
1.05	Load center	C	mm	600
Dimensions				
2.01	MAX.height of fork	h3	mm	195
2.02	MIN.height of fork	h13	mm	85
2.03	Front overhang	X	mm	950
2.04	Overall length (with fork)	L1	mm	1756
2.05	Wheelbase	Y	mm	1265
2.06	MIN.ground clearance,middle part of chassis	m2	mm	30
2.07	Overall width of fork (outside)	b5	mm	685
2.08	Fork,size (standerd)	L/S/e	mm	1150×160×45
2.09	Tread(Bearing end)	b11	mm	525
2.10	Min tuming radius(outside)	Wa	mm	1480
2.11	Min aisle wiathlerfor pallet 1000x1200,crossways	AST	mm	1815
2.12	Min aisle width for pallet 800x1200,lengthways	AST	mm	1865
Tyres				
3.01	Capital W (F/R, X=Driven wheels)			1X/4
3.02	Tyres type (F/R)			polyurethane
3.03	Tyres size,front	Φ×w	mm	Φ210×75
3.04	Tyres size,rear	Φ×w	mm	Φ80×70
Performance and other details				
4.01	Max. travelling speed,loaded/unloaded		km/h	4.2/4.5
4.02	MAX. gradeability,Loaded		%	6
4.03	Service weight(with battery)		kg	132
4.04	Drive motor		kw	0.75
4.05	Lift motor		kw	0.5
4.06	Controller			Curtis
4.07	Lithium battery(voltage /capacity)		V/Ah	Lithium battery 24V/30Ah