


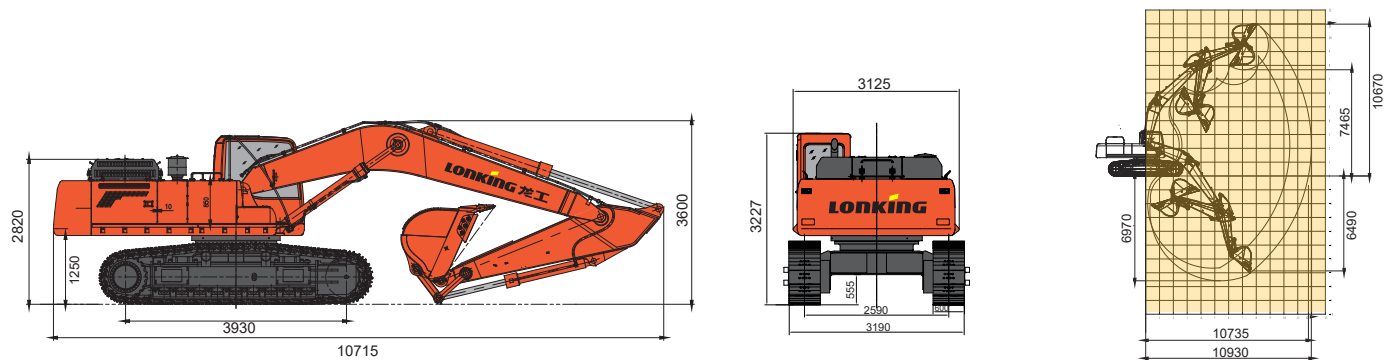

TECHNICAL PARAMETERS

ITEM		UNIT	CDM6336
Basic	Operating weight	kg	32800
	Boom length	mm	6150
	Arm length	mm	3200
	Standard bucket	m ³	1.6 (Rock)
	Max.Travel speed	km/h	3.6-6
	Max.Swing speed	rpm	11
	Grade ability	°	35(70%)
	Ground pressure	kPa	62.7
	Max.Traction force	kN	283
Engine	Engine model	—	6LTAA8.9-C325
	Rated power	kW/rpm	241/2000
	Max.Torque	Nm/rpm	1450/1300
	Displacement	L	8.9
	Fuel tank	L	600
Hydraulic	Max.Flow(total)	L/min	288×2
	Max.Working pressure	MPa	34.3
	Max.Pilot pressure	MPa	3.9
	Max.Arm digging force	kN	170
	Max.Bucket digging force	kN	220
Chassis	Hydraulic oil tank	L	300
	Track width	mm	600
	Track shoes number	—	47×2
	Carrier rollers number	—	2×2
	Track rollers number	—	8×2
Electric	System voltage	V	24
	Battery capacity	V/Ah	24/165×2

PRODUCT FEATURES

Cummins strong power engine. Emission standard meets EU stage II
Optimized Cooling System to Reduce Power Loss and Noise
Advanced Control System
Combined C type closed frame improves rigidity and strength of rotary platform.
Comfortable ROPS Cabin with 2.7m ³ Operational Space
No Frame Cab Glasses to Enlarge Operation Field of View
Rock Track Shoes, Chassis Reinforcement, More reliable and Wear-resistant
Heavy-duty Working Device with High Strength Low Alloyed Steels

OPTIONAL

Breaking hammer & pipeline
Work warning light
Walking alarm
Top protecting net
Front protecting net
700mm triple grouser shoes
800mm triple grouser shoes

CDM6336
HYDRAULIC EXCAVATOR



The following blank can be used for notes or comments

For more information on Lonking products,Please contact our local agent;

- OPERATING WEIGHT: 32800kg
- ENGINE POWER: 241kW
- BUCKET CAPACITY: 1.6m³
- TRAVEL SPEED: 3.6/6km/h