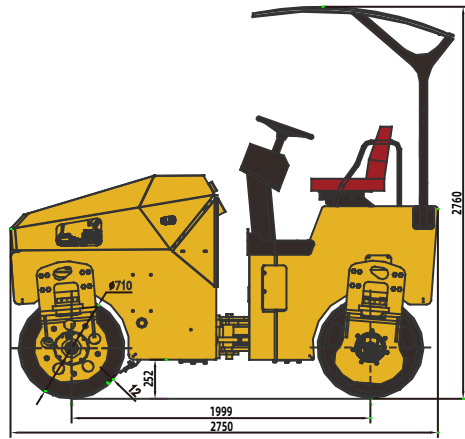


TECHNICAL PARAMETERS

	Name	Data
BASIC	Operating Weight	3000kg
	Weight Burden on Front	1500kg
	Weight Burden on Rear Drum	1500kg
	Min Ground Clearance(h)	252
	Wheelbase (L1)	2000
	Grade Ability	30%
	L×W1×H (mm)	2860×1350×2724
ENGINE	Manufacturer	QUAN CHAI
	Model	3B2-38C31
	Displacement	1.91
	Fuel consumption	7.7L
	Rated Power	28 kW
	Rated Speed	2600 rpm
	Emissions Standard	Nation III
DRIVE TRAIN	Drive Type	Hydrostatic Drive
	Travel Speed Forward	0-11.5 km/h
	Travel Speed Reverse	0-11.5 km/h
	Tire Type	—
	Min. Turning Radius	4000 mm
	Steering Angle	33 °
	Swing Angle	7 °
VIBRATION SYSTEM	Width of Drum (W2)	1200 mm
	Diameter of Drum	Φ710 mm
	Rim Thickness of Drum	16 mm
	Static Linear Load	125/125 N/cm
	Vibration Type	Open-loop Hydraulic Vibration
	Centrifugal Force	30 kN
	Vibration Frequency	50 Hz
BRAKE SYSTEM	Nominal Amplitude	0.5 mm
	Service Brake	Hydraulic Lock Front and Rear Brake
ELECTRIC	Parking Brake	Oil Cut Front and Rear Wheel Brake
	Voltage	12 V
SERVICE REFILL	Capacity	120 Ah
	Fuel Tank Capacity	50 L
	Hydraulic Tank Capacity	75 L

CONFIGURATION

QUAN CHAI Engine
Ferruginous Awning
Hydrostatic Drive
Double Drum Vibration System
Standard Steering System
Cold Start

OPTIONAL

Fabric awning
Pressure Measuring Tie-in

PRODUCT FEATURES

Single frequency, single amplitude, hydraulic vibratory road roller, well-know international brand hydraulic components.
Key parts are produced from famous international brand ,high reliability.
Fork-front frame structure , wide vision field makes road edge easy to observe during compacting work .
Steel enhanced sport bar , more effective protection for driver .
Three stage vibration damping system for driver , more comfortable operation .
GRP arc hoop , attractive appearance , more convenience for engine and transmission system maintenance .
Small drum , good compaction effect.

LONKING 龙工

CDM5033DG
DD SERIES DOUBLE DRUM
VIBRATORY ROLLERS

Efficiency Rules the Future



Product VR



For more information on Lonking products,
Please contact our local agent:

The following blank can be used for notes or comments.

LONKING (FU JIAN) INTERNATIONAL TRADE CO.,LTD.

LONKING HOLDINGS LIMITED

Add:26 Minyi Road,Xinqiao,Songjiang Industrial Zone,Shanghai

Tel: +86-21-3760 2242

E-mail:export@lonking.cn

http://www.lonkinggroup.com

- RATED POWER: 28kW/2600rpm
- OPERATING WEIGHT: 3000kg
- STATIC LINEAR LOAD: 125/125N/cm
- DRUM / TIRE LOAD: 1500/1500kg